



Product information

BOX TYPE FURNACE

Remote control - Max. Temperature 1200 °C

Model family: BOX-BW10-1200



Description



BOX-BW10-1200 furnace family was designed to provide a flexible and functional laboratory solution. This model family designed to serve for harsh and demanding thermal processes environment up to 1200 °C. Suitable for many applications including metals melting, organics combustion, ashing and ceramics sintering. Ideal choice for wax removal this model presents an every-day partner for professionals working in dental, jewelry or other similar areas.

The hot zone is constructed from high resistance, low porosity ceramic materials. The low density fibrous back insulation allows for rapid heat up and cool down rates. Having as major priority the economical operation this furnace was carefully designed with a double wall ceramic insulation serving from one hand as a heat exchanger preheating the incoming air and from the other as a heat barrier improving the overall thermal insulation.

With an exhaust chimney at the top, creating a strong natural convection, the entire volume of the chamber can be refreshed several times per minute. The preheated incoming air is entering the chamber through multiple holes creating a smooth and temperature uniform laminar air stream through the sample.

Ergonomic design with no protruding edges, bolts or other features combines stainless steel parts with painted finish parts for an improved esthetic result.

Equipped with a sophisticated, remote, touch screen, temperature controller, running the specially designed PYROLOGISM 2.0 software, this furnace family provides a really unique and friendly, windows oriented architecture interface with multiple, advanced features and peripherals.

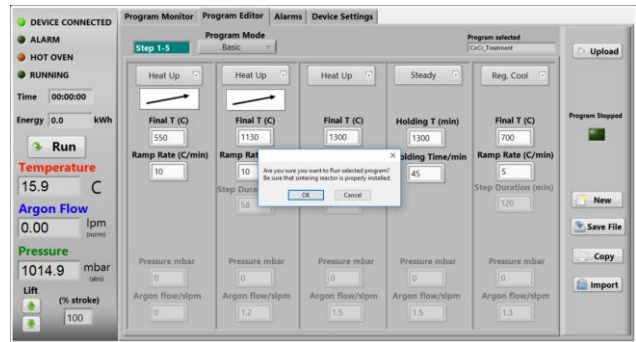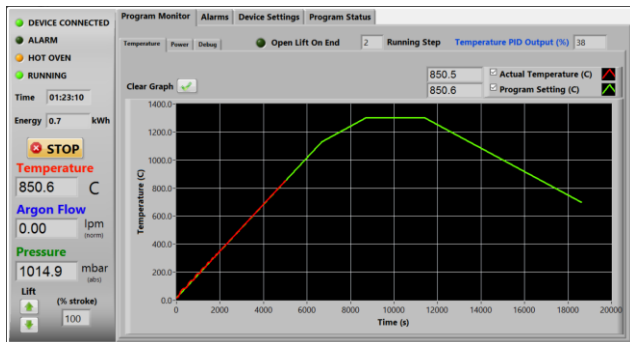


Key features

- Control strategy by Thermansys PCC (Power Consistent Control) insures silent operation and compliance with EMC standards
- Modern double wall construction keeps external surfaces temperature low, emphasizing in operator safety
- PID control, accurate and uniform temperature profiles
- KANTHAL® FeCrAl resistors
- Lift up door keep hot surfaces away from operator
- ± 5 °C temperature uniformity
- Touch screen computer running the user friendly, PYROLOGISM 2.0 software
- Power and true RMS Current measuring circuits
- Heater failure, open control thermocouple detection alarms and interlocks.
- Stand alone over-temperature limiter (Watchdog) with manual reset in accordance with EN 60519-2 to protect the heater and load. Alarm event output (dry contact 3A/250V AC/DC)

PYROLOGISM control and monitoring software

- Quick setting of a single ramp rate to a set point -run on timer function
- Set-point programming with up to 15 ramp and constant temperature programming steps – graphical inspection of programming
- Storage and reload of unlimited number of distinct programs
- Graphical inspection of programming
- Real time chart illustrating control temperature and running set point with dynamic zoom
- Events and alerts messaging
- Real time true-RMS Current (A), Voltage (V) and Power (W) measurements
- Real time actual Power (W) and totalized Energy (kWh) chart
- Saves all data on local memory
- Tools for manual PID tuning and auto-tuning
- Virtual keyboard, alarm and event message tab
- Watchdog over temperature limiter monitor/configuration
- Versions running at Microsoft® Windows are available for control by a PC through USB port

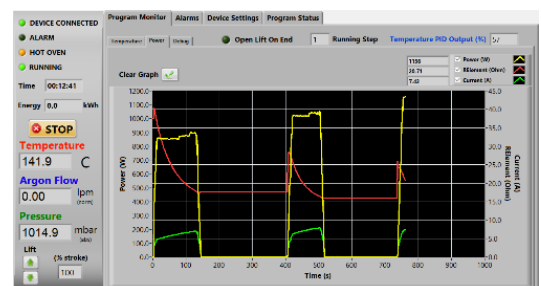

Description	Status	Reset
Open Thermocouple	ok	Open Alarm/Reset
Open Circuit	ok	Open Alarm/Reset
Short Circuit	ok	Open Alarm/Reset
Lift Collision	ok	Lift Alarm/Reset
Low Argon Flow	ok	Argon Low Flow Alarm/Reset
Vacuum Leak	ok	Vacuum Leak Alarm/Reset
Over Temperature Watchdog	ok	Watchdog Alarm/Reset
Watchdog Temperature (C)	0.0	Watchdog Set Point (C) Upload
		Watchdog Active Set Point (C)

The screenshot also shows the left sidebar with 'Run' and 'STOP' buttons, and real-time data: Energy 0.0 kWh, Temperature 20.4 C, Argon Flow 0.00 lpm, Pressure 1014.3 mbar, and Lift 100%. The top right shows 'Program Monitor', 'Program Editor', 'Alarms', and 'Device Settings' tabs.

Specifications and Ordering Information.

- Maximum continuous temperature 1200 °C
- Operating Power: 208 /240VAC – 50/60Hz
- Two independent S type embedded thermocouples for controller and over-temperature limiter feedback
- Temperature control accuracy ± 0.5 °C
- Semi-exposed resistors type

CE Certified. Compliant with **Low Voltage Directive 2006/95/EC** (harmonized referenced standard EN 61010-1: 2001 and EN 61010-2-010:2003) and **EMC Directive 2004/108/EC** (harmonized referenced standard EN 61326-1:2006).

Produced in **GREECE** following **ISO 9001:2008 quality management system** and **ISO 14001:2004 environmental management system**.

TABLE1. BOX-BW10-1100 Family Models

Model Part Number BOX-BW10..	Max. Cont. Temp. °C X Heat up time* min.	Furnace internal dim. WxHxD mm	Heated Volume liters	Furnace external dim. WxH**xD mm	Nominal Max. Power (W)
_V2.6-1200	1200 x 80	100x120x220	2.6	400x470x410	1600
_V4.0-1200	1200 x 80	180x130x170	4.0	480x480x360	1800
_V6.0-1200	1200 x 80	180x180x190	6.0	480x540x380	2600
_V8.0-1200	1200 x 80	180x180x250	8.0	480x540x440	3400
_V14.0-1200	1200 x 80	200x200x340	14.0	500x560x560	4600

* Furnace working with no load.

** Furnace door closed, plus 50 mm for chimney.

Ordering Example:

- BOX-BW10_V2.6-1200: This Part Number includes one BOX-BW10-1200 family furnace having 100x120x220mm internal chamber dimensions including all standard features.

Contact details:

Apollo S&H B.V.
 Het Wargaren 24, 5397 GN Lith, the Netherlands
 tel. +31 412 - 484986, fax. 0030 2310 942336
 e-mail: info@apollo-service.nl
 www.apollo-service.nl